



Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C (518101)

Site: Chamber#2

Tel:+86-0755-33663308
Fax:+86-0755-33663309

Job No.: File :RE
Standard: EN 61000-6-4
Test item: Radiation Test
Temp.(°C)/Hum.(%): 25 C / 55 %
EUT:
Model: CTN-1261C
Mode:

Polarization: Vertical
Power Source: AC 230V/50Hz
Date: 2019/11/07
Time: 9:46:27
Engineer Signature:
Distance:

Note: 待机



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Margin (dB)	Detector	Remark
1	30.7455	52.74	-14.39	38.35	50.00	-11.65	peak	
2	68.8721	52.50	-14.95	37.55	50.00	-12.45	peak	
3*	131.2965	62.32	-16.66	45.66	50.00	-4.34	peak	
4	175.0368	51.98	-14.74	37.24	50.00	-12.76	peak	
5	344.3855	37.45	-8.37	29.08	57.00	-27.92	peak	
6	550.9480	37.58	-5.46	32.12	57.00	-24.88	peak	
7	827.4934	36.39	-1.59	34.80	57.00	-22.20	peak	



Shenzhen SEM.Test Technology Co., Ltd.


1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C (518101)

Site: Chamber#2
Tel:+86-0755-33663308
Fax:+86-0755-33663309

Job No.: File :RE
Standard: EN 61000-6-4
Test item: Radiation Test
Temp.(°C)/Hum.(%): 25 C / 55 %
EUT:
Model: CTN-1261C
Mode:

Polarization: Horizontal
Power Source: AC 230V/50Hz
Date: 2019/11/07
Time: 9:51:31
Engineer Signature:
Distance:

Note: 待机

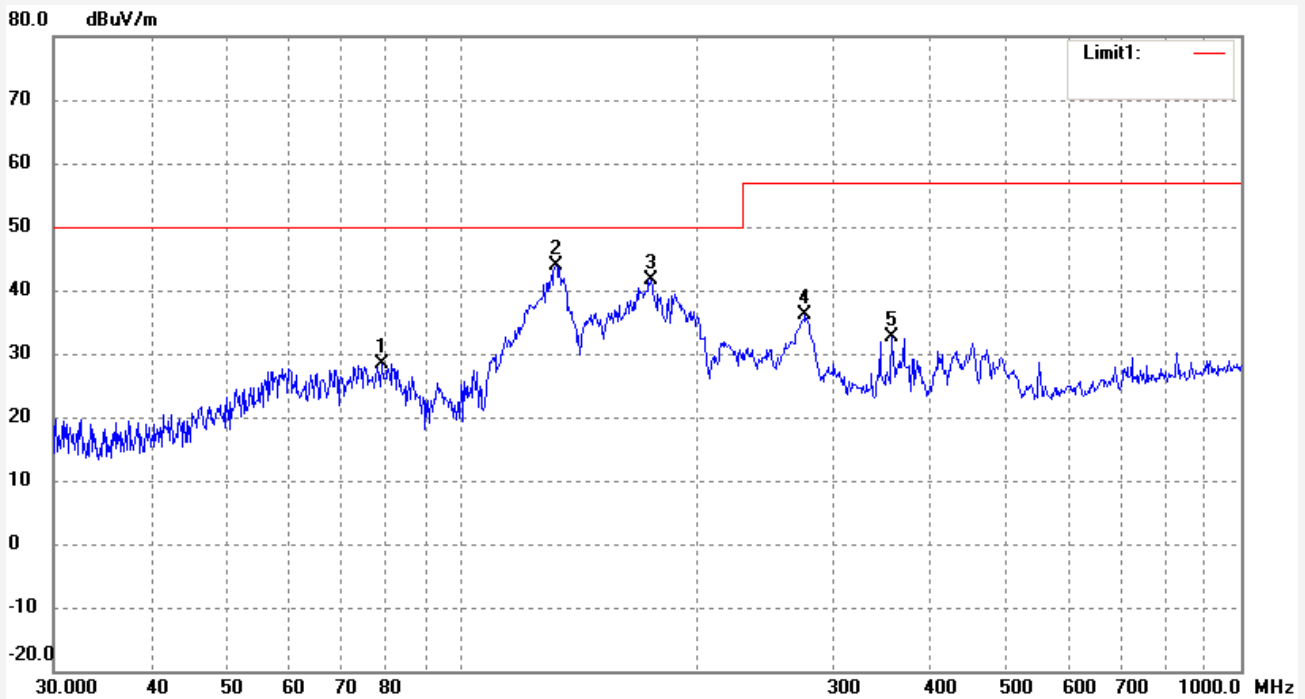

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Margin (dB)	Detector	Remark
1	78.9652	43.74	-15.40	28.34	50.00	-21.66	peak	
2*	132.2206	60.36	-16.54	43.82	50.00	-6.18	peak	
3	175.0368	56.46	-14.74	41.72	50.00	-8.28	peak	
4	276.1235	46.71	-10.50	36.21	57.00	-20.79	peak	
5	356.6758	40.66	-7.92	32.74	57.00	-24.26	peak	



Shenzhen SEM.Test Technology Co., Ltd.


1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C (518101)

Site: Chamber#2
Tel:+86-0755-33663308
Fax:+86-0755-33663309

Job No.: File :RE
Standard: EN 61000-6-4
Test item: Radiation Test
Temp.(°C)/Hum.(%): 25 C / 55 %
EUT:
Model: CTN-1261C
Mode:

Polarization: Horizontal
Power Source: AC 230V/50Hz
Date: 2019/11/07
Time: 10:14:51
Engineer Signature:
Distance:

Note: 帶负载

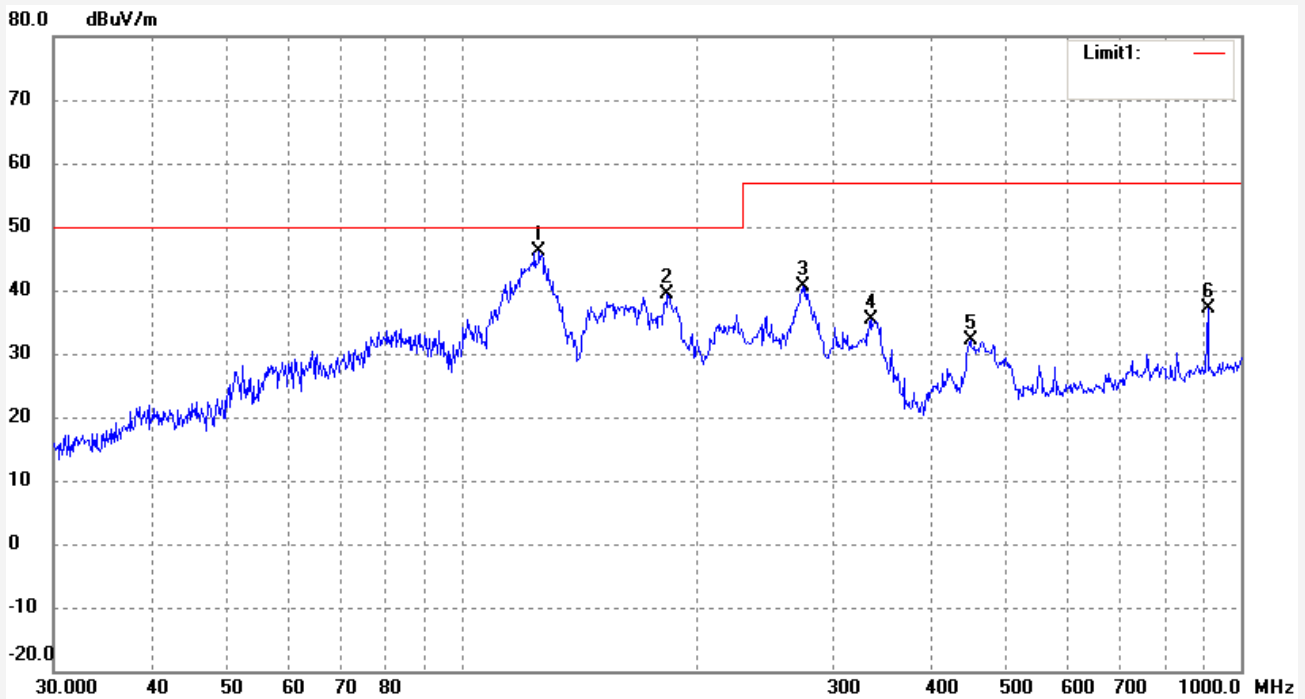

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Margin (dB)	Detector	Remark
1*	125.8864	61.82	-15.73	46.09	50.00	-3.91	peak	
2	183.8440	53.47	-14.14	39.33	50.00	-10.67	peak	
3	274.1939	51.13	-10.58	40.55	57.00	-16.45	peak	
4	336.0352	44.14	-8.82	35.32	57.00	-21.68	peak	
5	449.5558	38.55	-6.35	32.20	57.00	-24.80	peak	
6	906.4824	37.51	-0.47	37.04	57.00	-19.96	peak	



Shenzhen SEM.Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C (518101)

Site: Chamber#2
Tel:+86-0755-33663308
Fax:+86-0755-33663309

Job No.: File :RE
Standard: EN 61000-6-4
Test item: Radiation Test
Temp.(°C)/Hum.(%): 25 C / 55 %
EUT:
Model: CTN-1261C
Mode:

Polarization: Vertical
Power Source: AC 230V/50Hz
Date: 2019/11/07
Time: 10:17:10
Engineer Signature:
Distance:

Note: 帶负载



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Margin (dB)	Detector	Remark
1*	126.7723	62.55	-15.97	46.58	50.00	-3.42	peak	
2	200.6880	49.75	-12.69	37.06	50.00	-12.94	peak	
3	275.1569	49.79	-10.54	39.25	57.00	-17.75	peak	
4	344.3854	38.84	-8.37	30.47	57.00	-26.53	peak	
5	552.8832	36.18	-5.37	30.81	57.00	-26.19	peak	